


SYSTEM FEEDER MODEL NSSF6-2

The Neutra-Safe® System Feeder is designed to feed and maintain pressure in closed loop hydronic and thermal solar systems that require up to 50 PSI of cold static pressure for use with water or glycol (up to 50%) solutions.

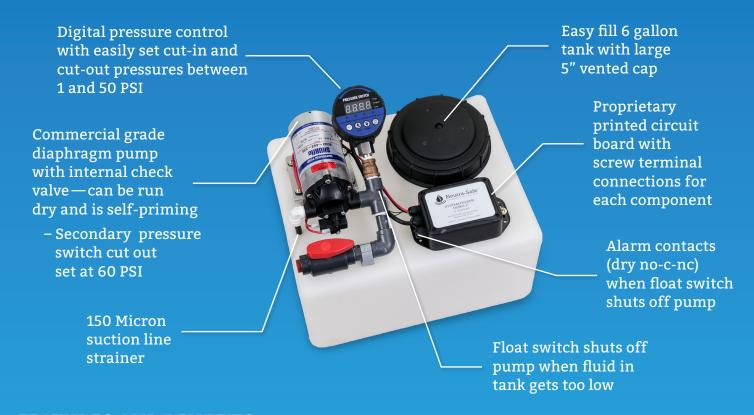

FEATURES AND BENEFITS

- ▶ UL Listed 10 amp power supply—can be used in any standard 115VAC outlet
- ▶ Eliminates need for pressure reducing valve and back flow preventer
- ▶ Allows for system leak detection
- ▶ Limits the amount of fluid that can be lost in the event a major leak
- ▶ Fluid level markings molded into tank
- ▶ Threaded inserts molded into tank bottom for attaching optional mounting brackets